

4. NOISE LEVEL


(1) Sound power level

Model SRK25ZSP-W1

(Indoor unit)


Model	SRK25ZSP-W1	
Noise level	Cooling	57 dB(A)
	Heating	56 dB(A)

Condition	ISO5151 T1/H1
MODE	Rated capacity value (Hi)

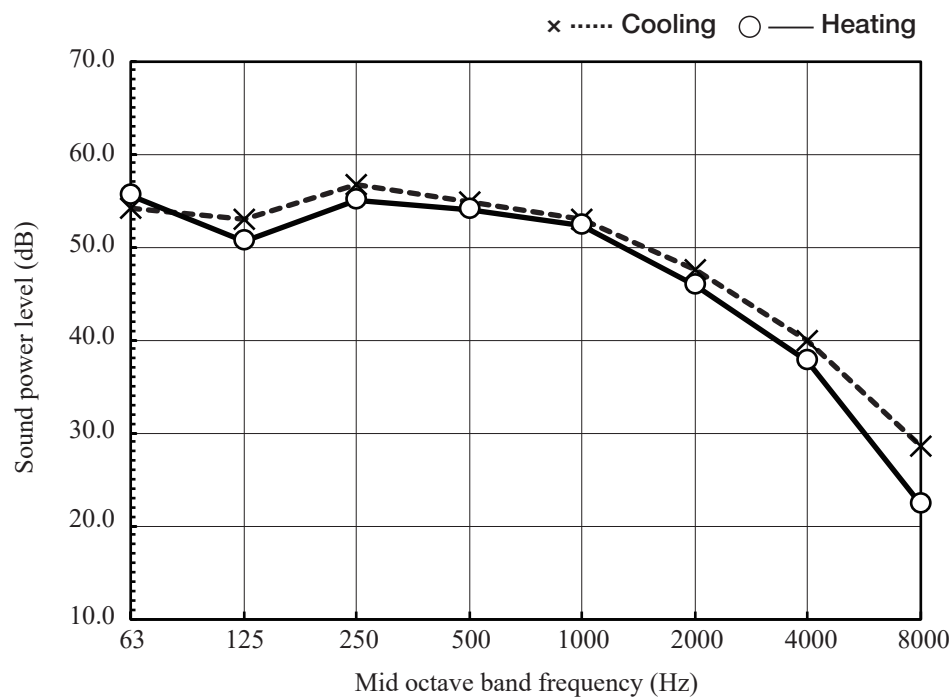

(Outdoor unit)

Model	SRC25ZSP-W1	
Noise level	Cooling	57 dB(A)
	Heating	57 dB(A)

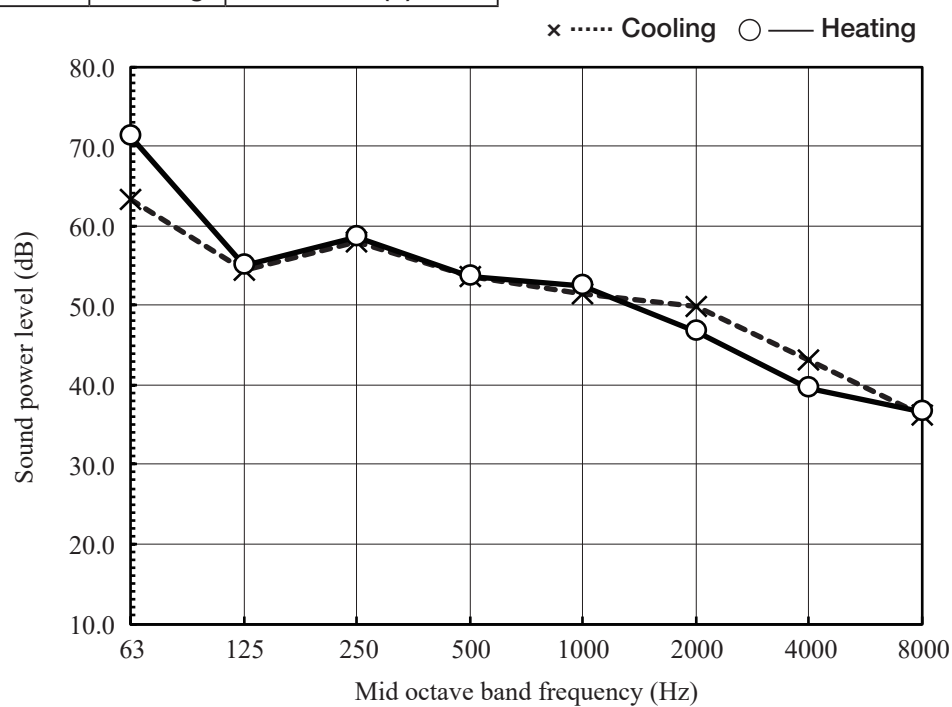


Model SRK35ZSP-W1

(Indoor unit)


Model	SRK35ZSP-W1	
Noise level	Cooling	57 dB(A)
	Heating	57 dB(A)

Condition	ISO5151 T1/H1
MODE	Rated capacity value (Hi)

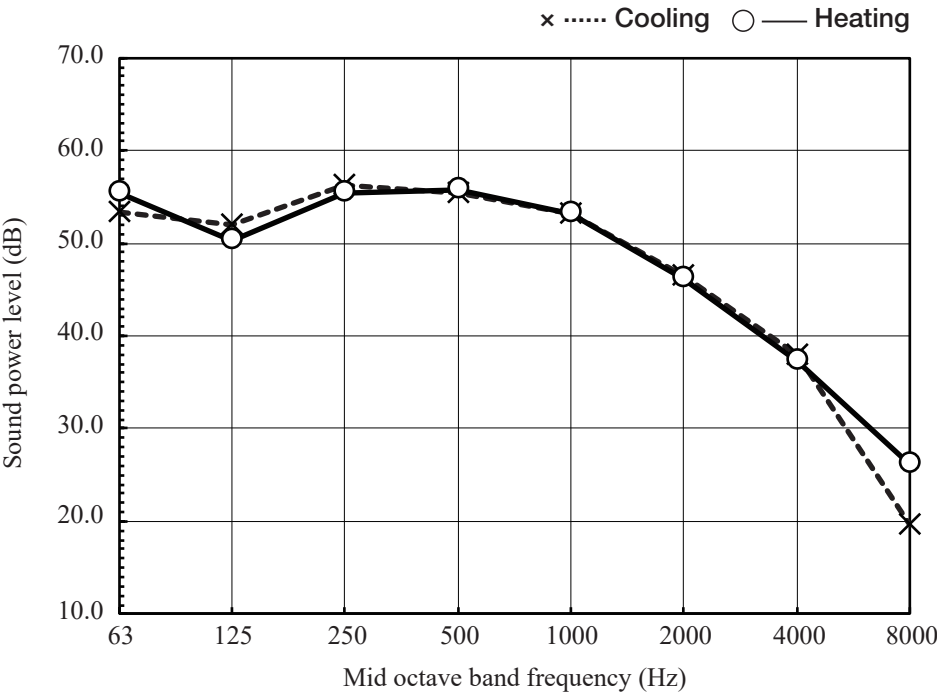

(Outdoor unit)

Model	SRC35ZSP-W1	
Noise level	Cooling	59 dB(A)
	Heating	60 dB(A)

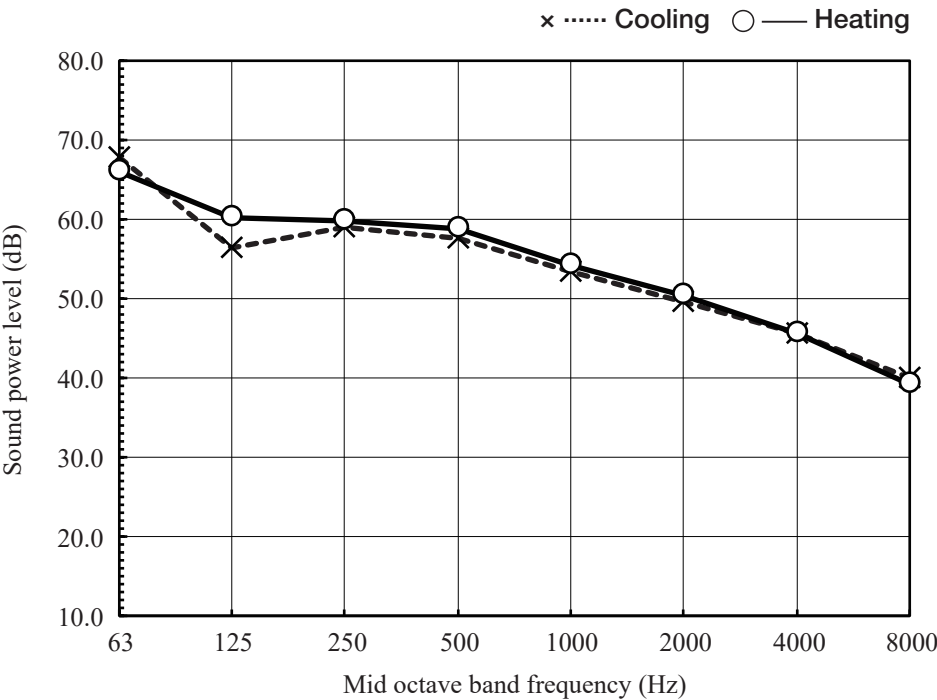


Model SRK45ZSP-W1

(Indoor unit)


Model	SRK45ZSP-W1	
Noise level	Cooling	57 dB(A)
	Heating	62 dB(A)

Condition	ISO5151 T1/H1
MODE	Rated capacity value (Hi)

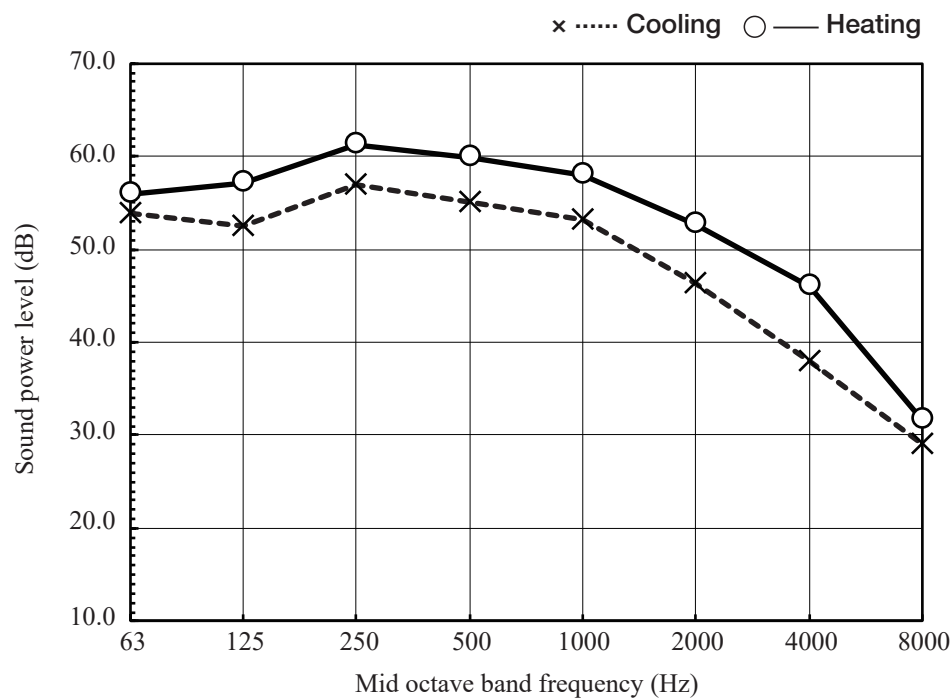

(Outdoor unit)

Model	SRC45ZSP-W1	
Noise level	Cooling	64 dB(A)
	Heating	62 dB(A)

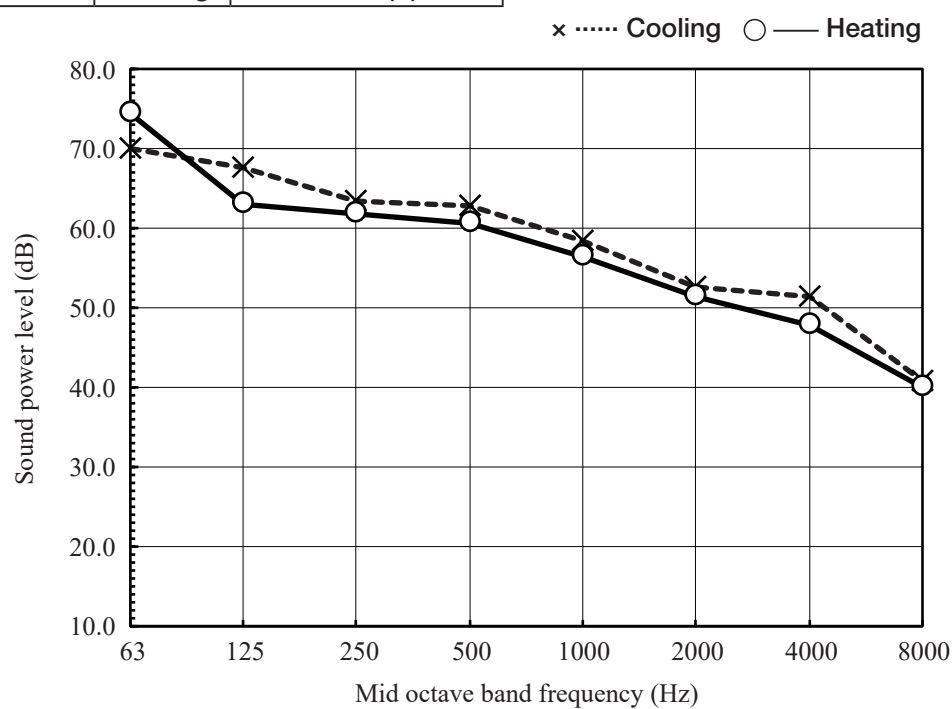


Model SRK50ZSP-W1

(Indoor unit)


Model	SRK50ZSP-W1	
Noise level	Cooling	59 dB(A)
	Heating	62 dB(A)

Condition	ISO5151 T1/H1
MODE	Rated capacity value (Hi)

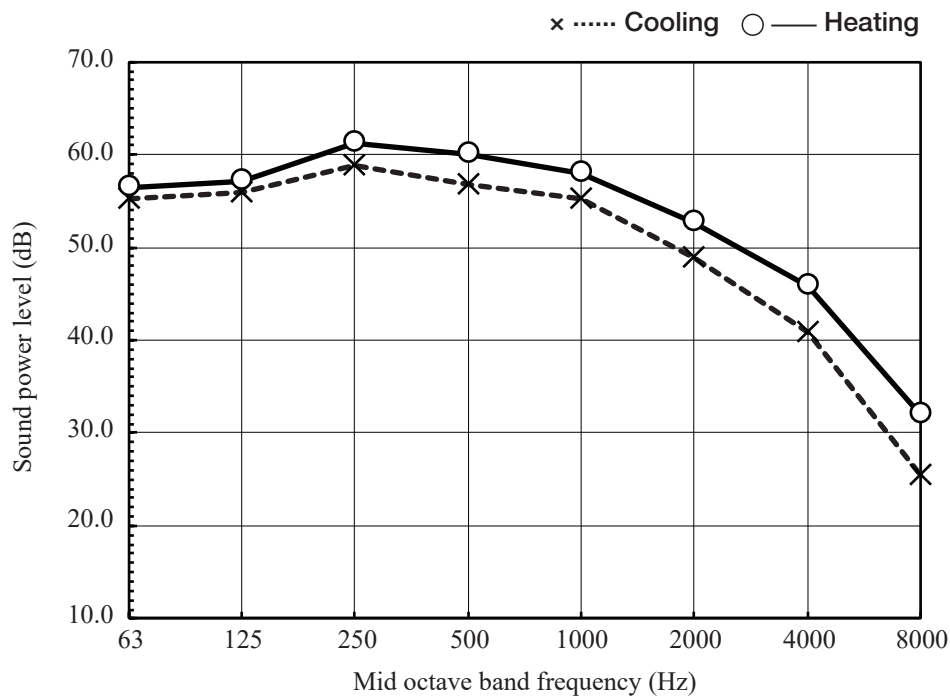

(Outdoor unit)

Model	SRC50ZSP-W1	
Noise level	Cooling	65 dB(A)
	Heating	65 dB(A)

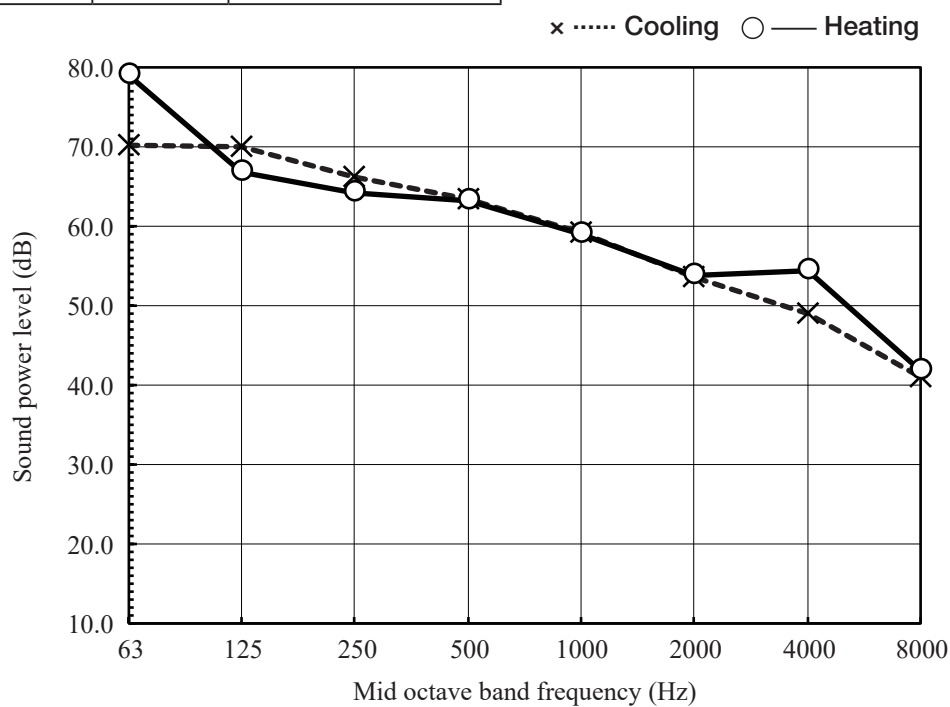

(2) Sound pressure level

(a) Rated capacity value


Model SRK25ZSP-W1

(Indoor unit)

Model	SRK25ZSP-W1	
Noise level	Cooling	44 dB(A)
	Heating	42 dB(A)

Condition	ISO5151 T1/H1
MODE	Rated capacity value (Hi)


● Mike position

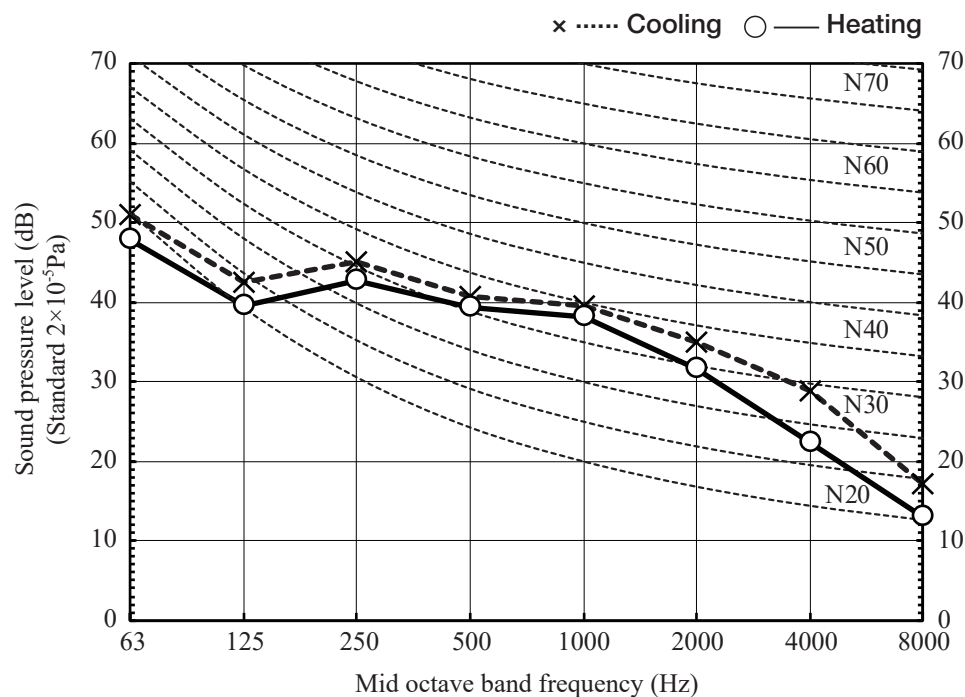

(Outdoor unit)

Model	SRC25ZSP-W1	
Noise level	Cooling	47 dB(A)
	Heating	45 dB(A)

● Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

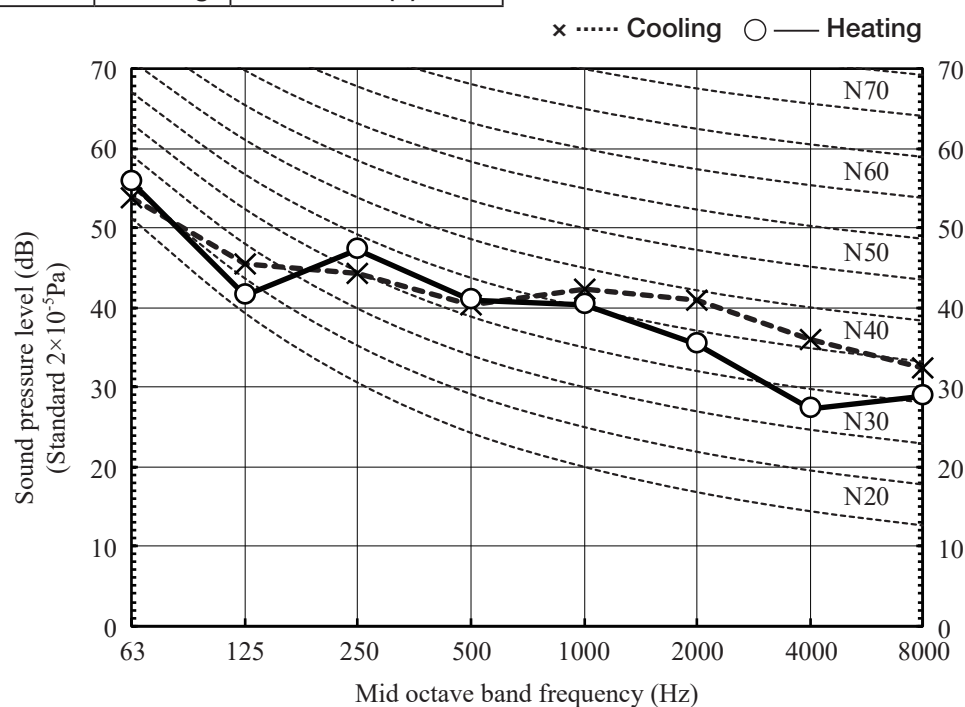


Model SRK35ZSP-W1

(Indoor unit)

Model	SRK35ZSP-W1	
Noise level	Cooling	44 dB(A)
	Heating	44 dB(A)

Condition	ISO5151 T1/H1
MODE	Rated capacity value (Hi)


● Mike position

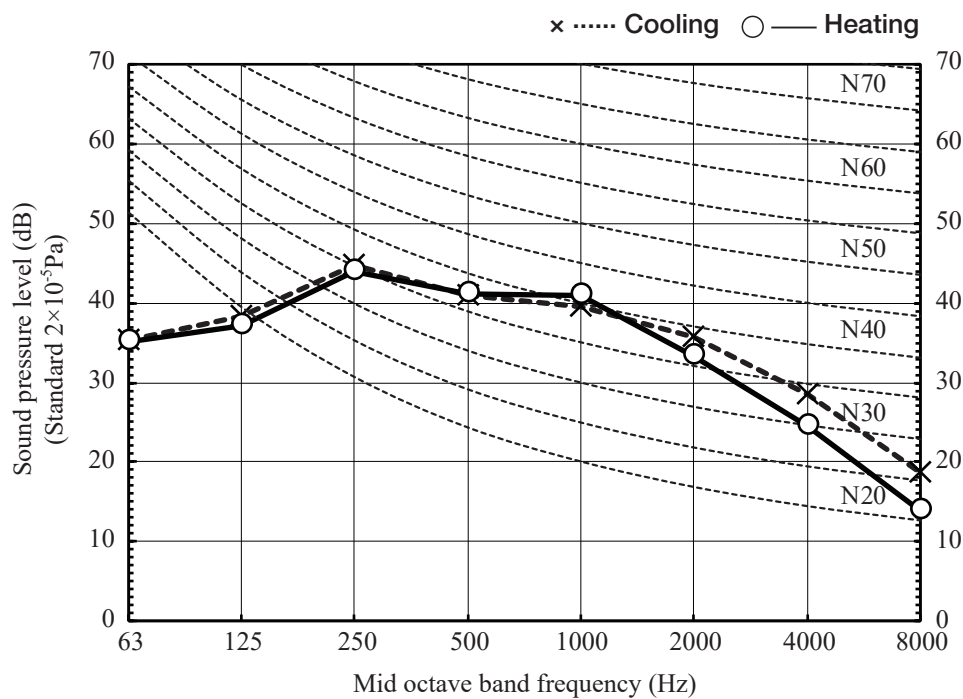

(Outdoor unit)

Model	SRC35ZSP-W1	
Noise level	Cooling	47 dB(A)
	Heating	47 dB(A)

● Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

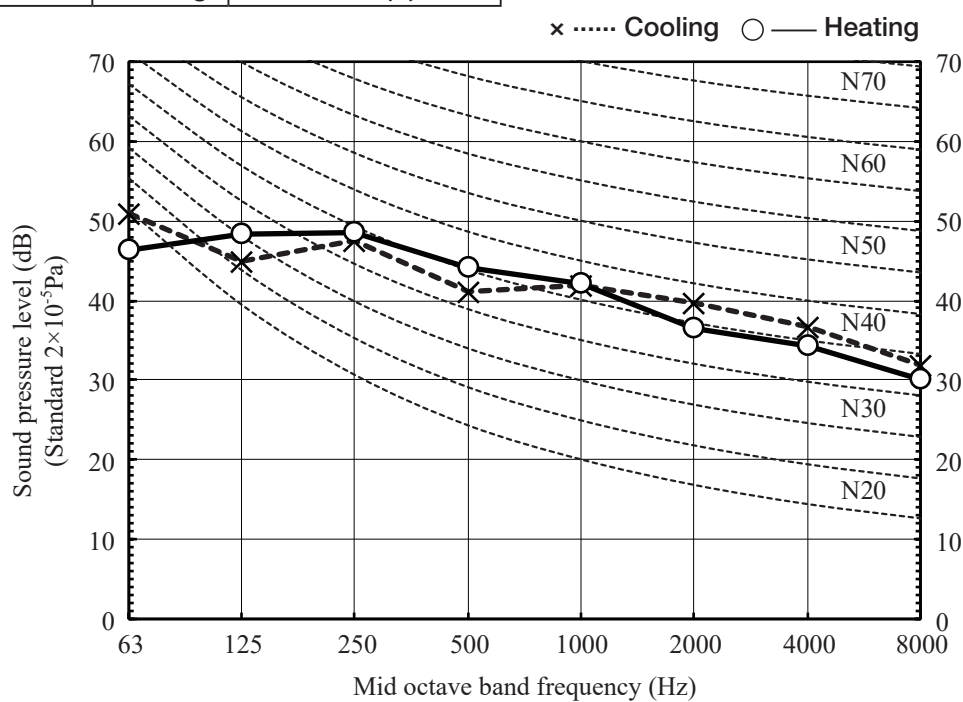


Model SRK45ZSP-W1

(Indoor unit)

Model	SRK45ZSP-W1	
Noise level	Cooling	44 dB(A)
	Heating	48 dB(A)

Condition	ISO5151 T1/H1
MODE	Rated capacity value (Hi)


● Mike position

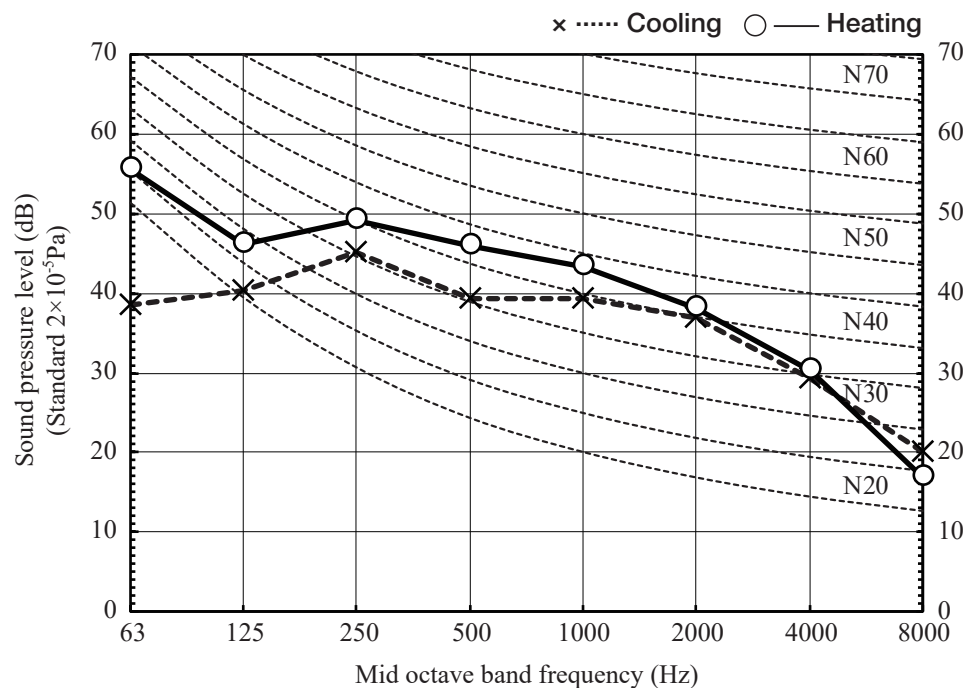

(Outdoor unit)

Model	SRC45ZSP-W1	
Noise level	Cooling	51 dB(A)
	Heating	51 dB(A)

● Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

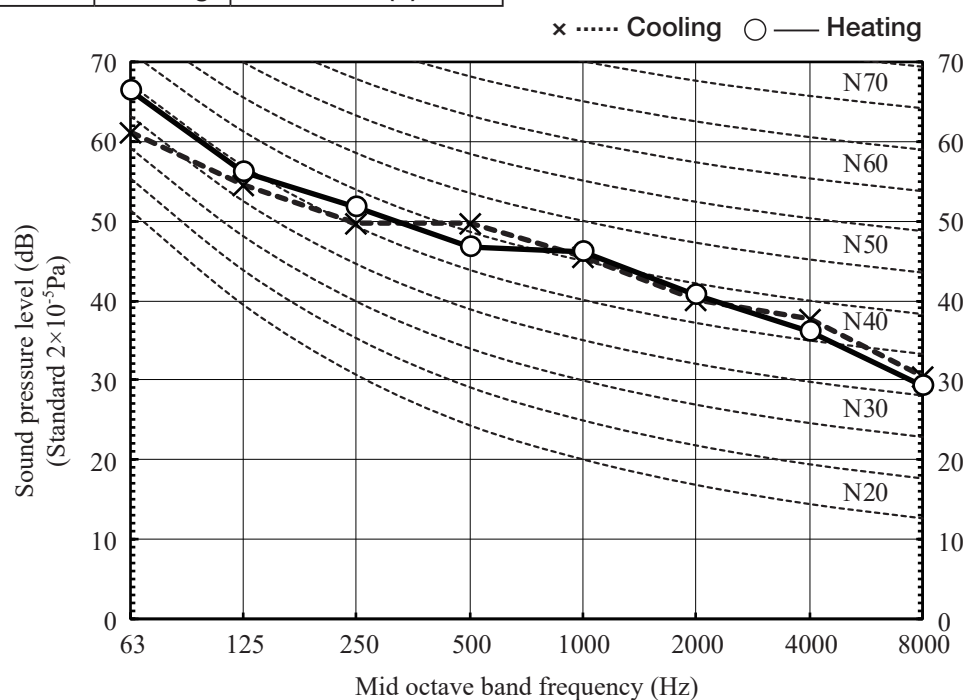


Model SRK50ZSP-W1

(Indoor unit)

Model	SRK50ZSP-W1	
Noise level	Cooling	46 dB(A)
	Heating	48 dB(A)

Condition	ISO5151 T1/H1
MODE	Rated capacity value (Hi)


● Mike position

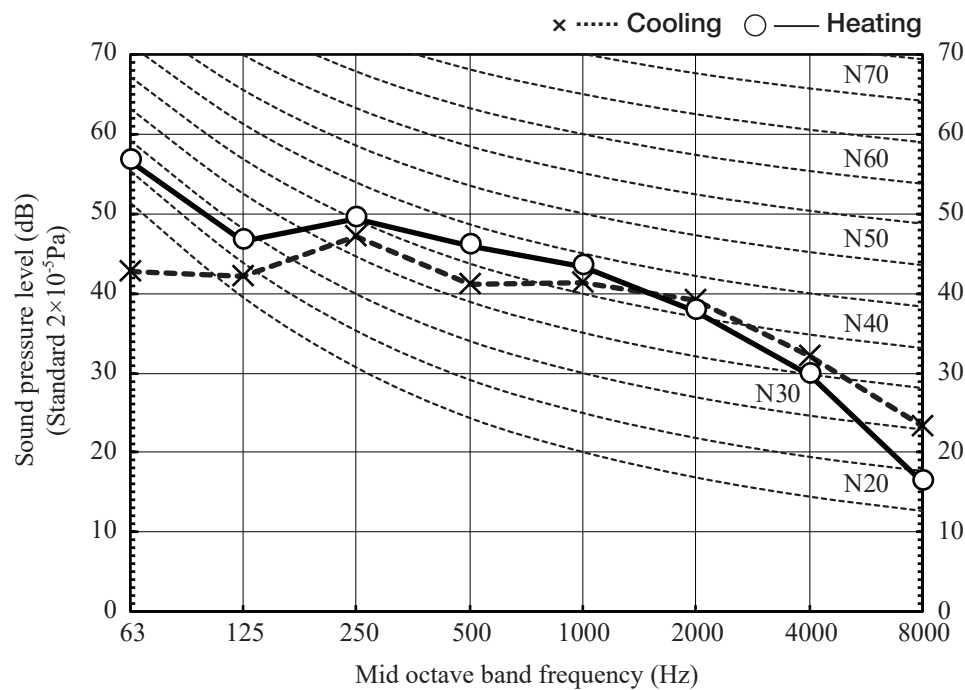

(Outdoor unit)

Model	SRC50ZSP-W1	
Noise level	Cooling	52 dB(A)
	Heating	52 dB(A)

● Mike position: at highest noise level in position as mentioned below
Distance from front side 1m

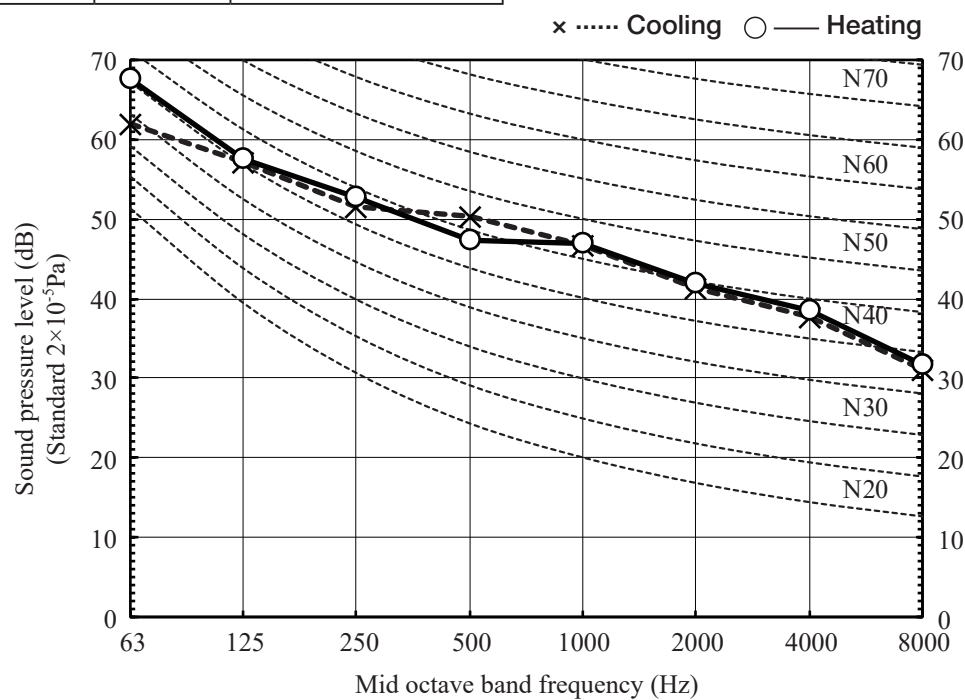


(b) Each fan speed mode

(Indoor unit)

Model	SRK25ZSP-W1	
Noise level	Cooling	33 dB(A)
	Heating	33 dB(A)

Condition	ISO5151 T1/H1
MODE	Me

●Mike position

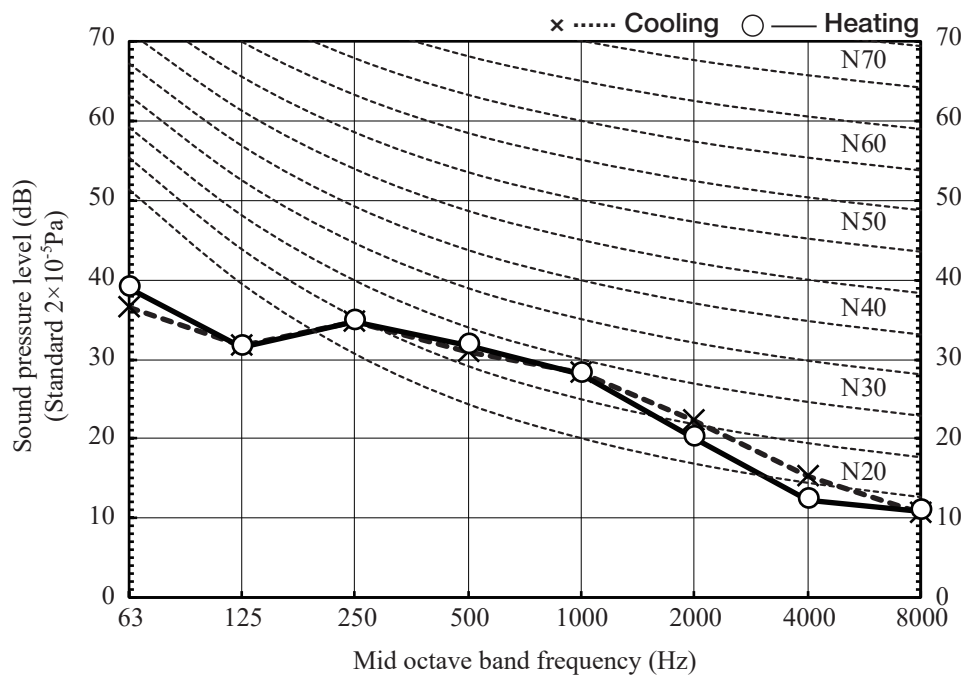


(Indoor unit)

Model	SRK25ZSP-W1	
Noise level	Cooling	21 dB(A)
	Heating	25 dB(A)

MODE	Lo
------	----

●Mike position

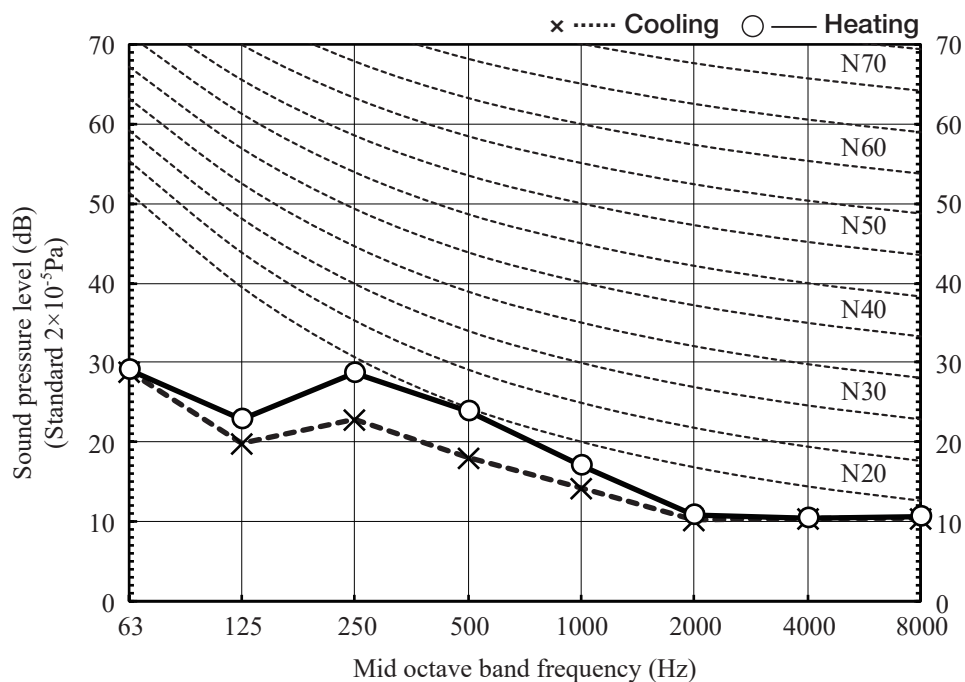


(Indoor unit)

Model	SRK35ZSP-W1	
Noise level	Cooling	35 dB(A)
	Heating	35 dB(A)

Condition	ISO5151 T1/H1
MODE	Me

●Mike position

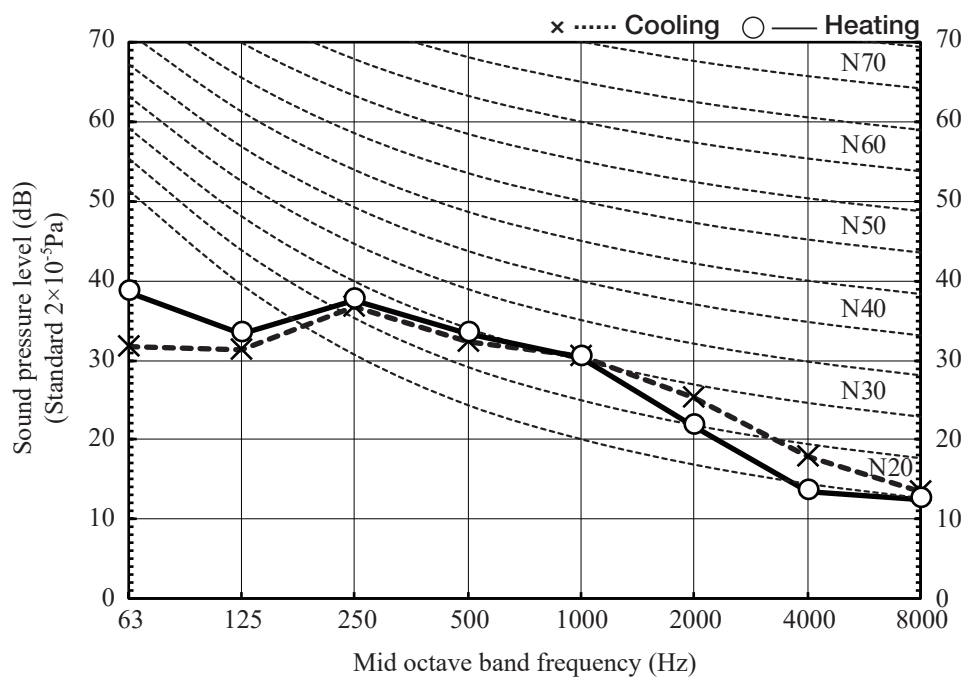


(Indoor unit)

Model	SRK35ZSP-W1	
Noise level	Cooling	22 dB(A)
	Heating	27 dB(A)

MODE	Lo
------	----

●Mike position

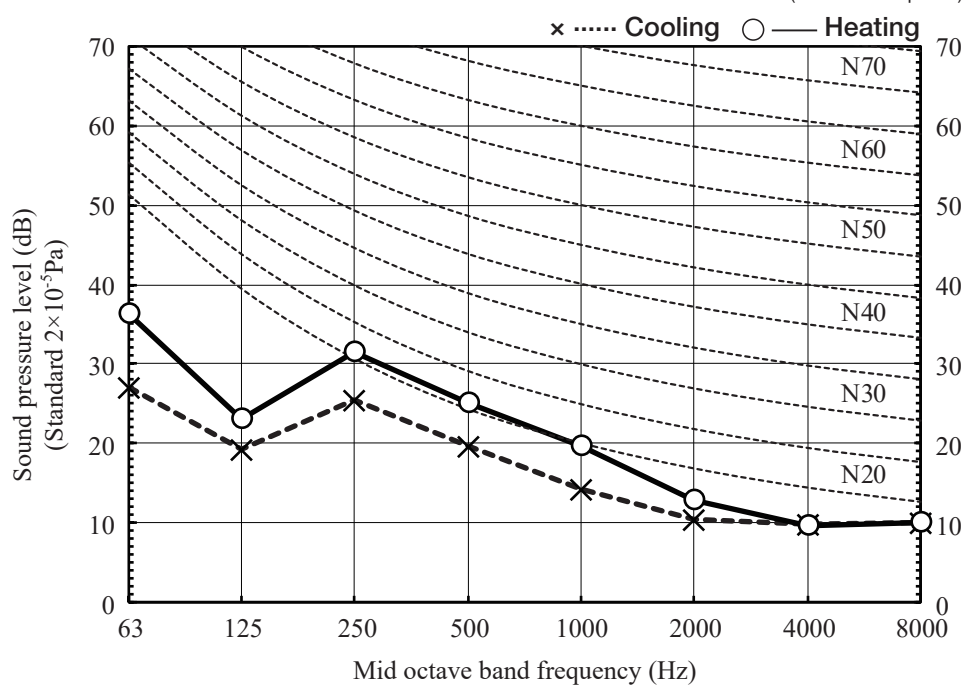


(Indoor unit)

Model	SRK45ZSP-W1	
Noise level	Cooling	37 dB(A)
	Heating	40 dB(A)

Condition	ISO5151 T1/H1
MODE	Me

●Mike position

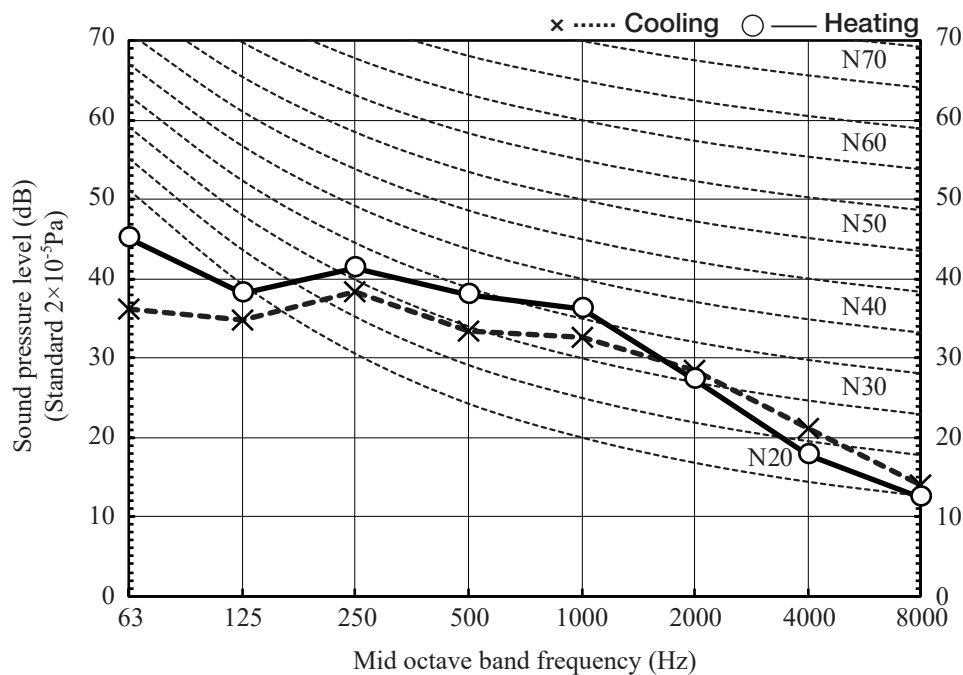


(Indoor unit)

Model	SRK45ZSP-W1	
Noise level	Cooling	22 dB(A)
	Heating	28 dB(A)

MODE	Lo
------	----

●Mike position

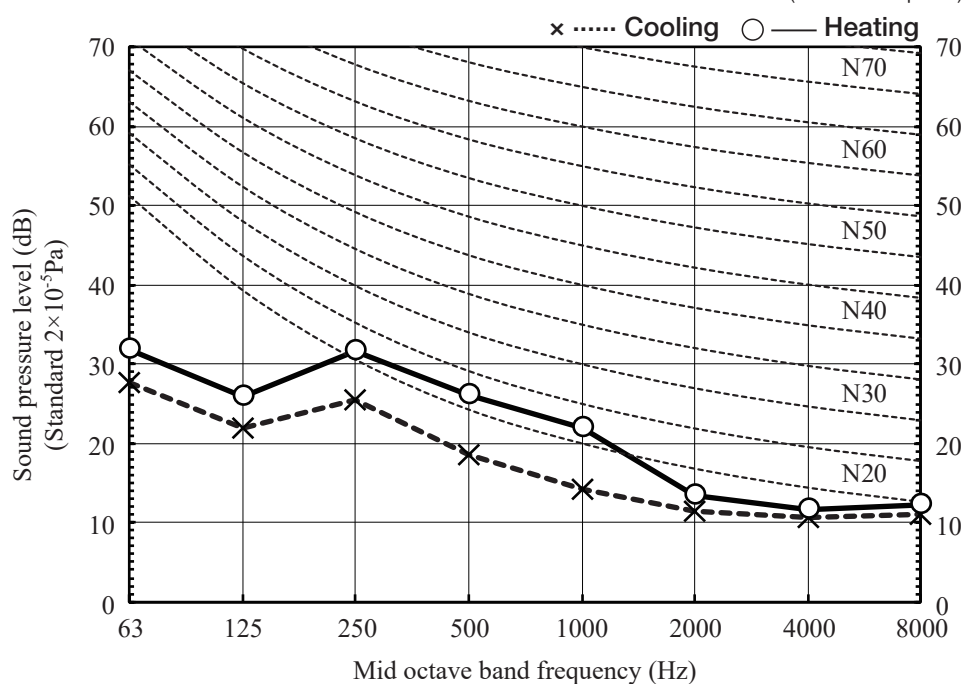


(Indoor unit)

Model	SRK50ZSP-W1	
Noise level	Cooling	37 dB(A)
	Heating	40 dB(A)

Condition	ISO5151 T1/H1
MODE	Me

●Mike position

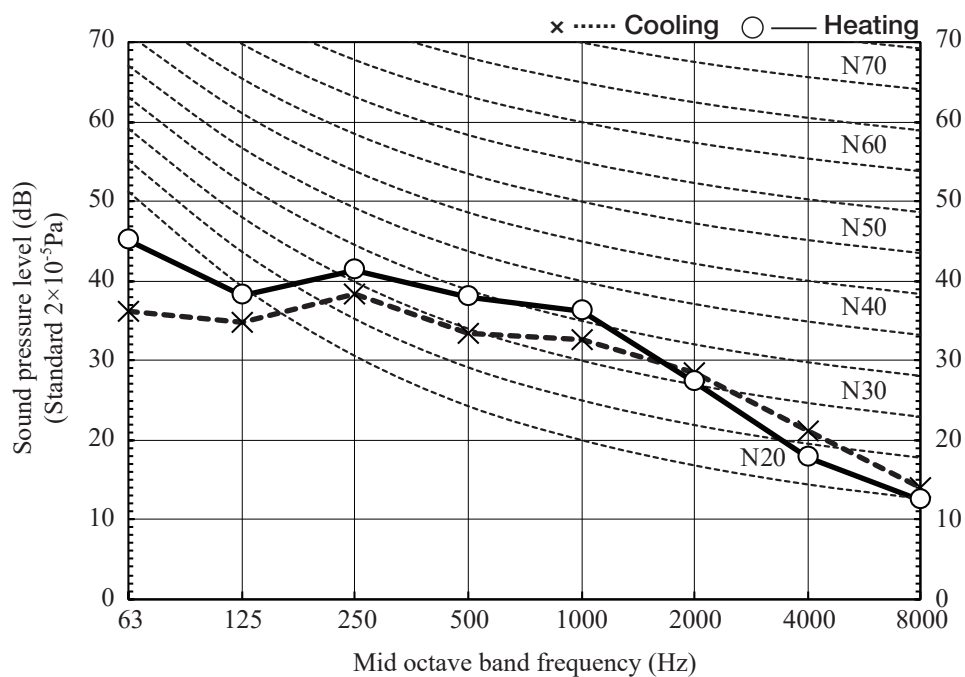

(Indoor unit)

Model	SRK50ZSP-W1	
Noise level	Cooling	22 dB(A)
	Heating	28 dB(A)

MODE Lo

●Mike position

