



SRC50ZS-W,-S SRC25ZMX-S SRC35ZMX-S SRC45ZSP-W,-S

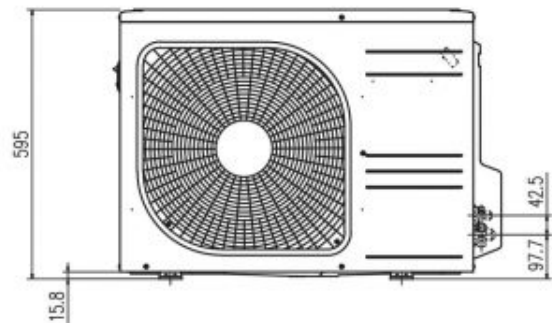

Symbol	Content	
A	Service valve connection (gas side)	ZMX: $\phi 9.52$ (3 / 8") (Flare) ZS,ZMP: $\phi 12.7$ (1 / 2") (Flare)
B	Service valve connection (liquid side)	$\phi 6.35$ (1 / 4") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	$\phi 20 \times 2$ places
E	Anchor bolt hole	M10 $\times 4$ places

Minimum installation space				
Dimensions	Examples of installation			
	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

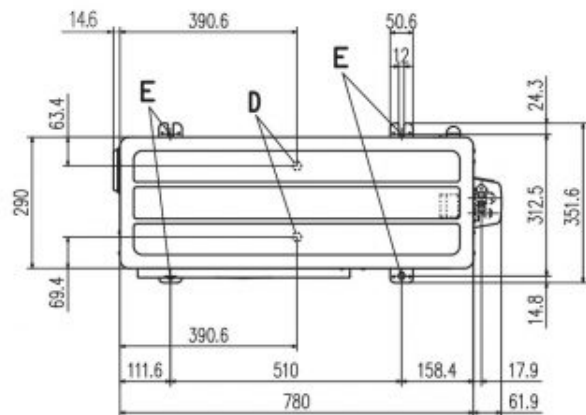