




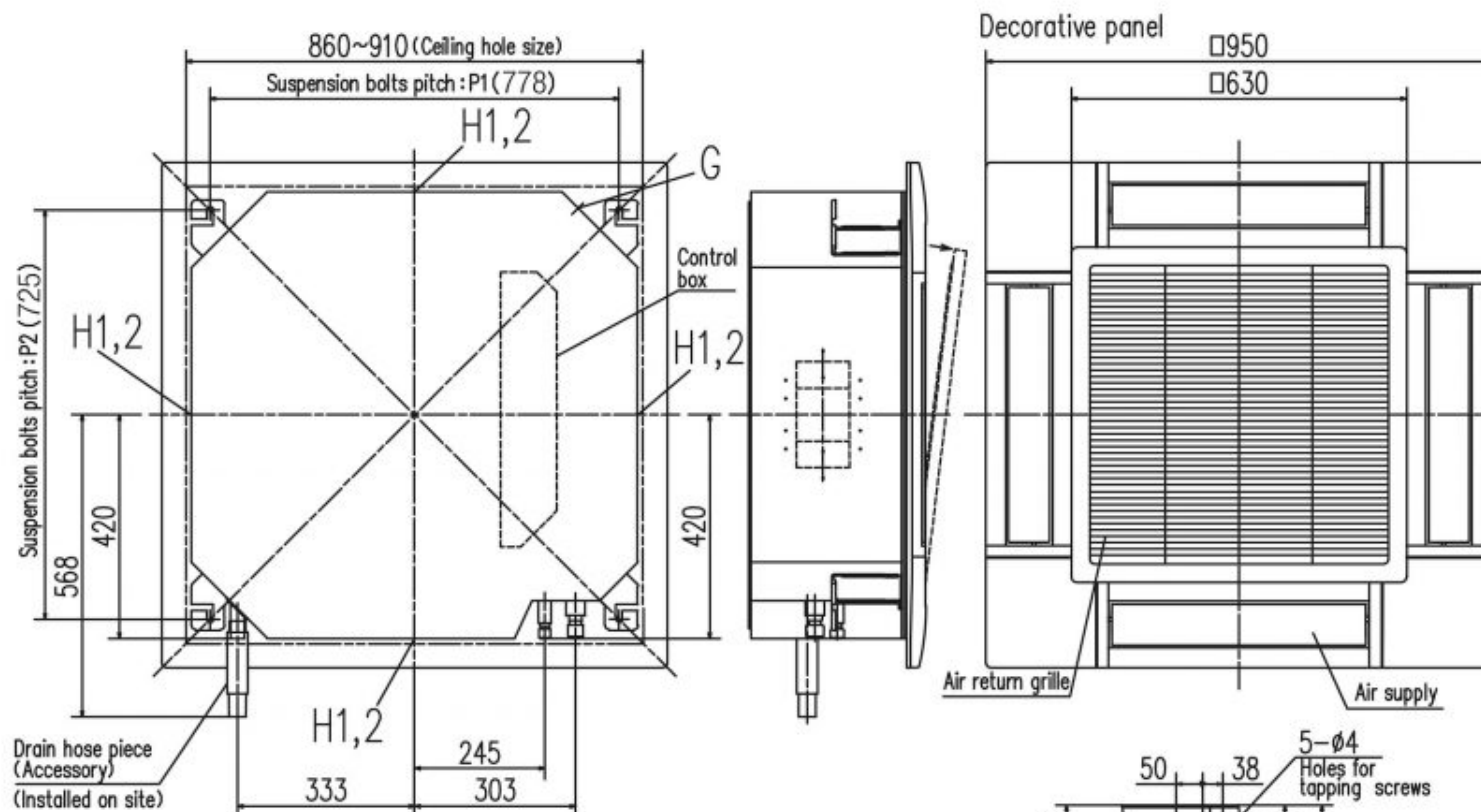

Symbol	Content	
A	Gas piping	φ15.88 (5/8") (Flare)
B	Liquid piping	φ9.52 (3/8") (Flare)
C	Drain piping	VP25 (O.D.32)
D	Hole for wiring	
F	Suspension bolts	(M10 or M8)
G	Outside air opening for ducting	(Knock out)
H1	Air outlet opening for ducting	φ125 (Knock out)
H2		φ200 (Knock out)

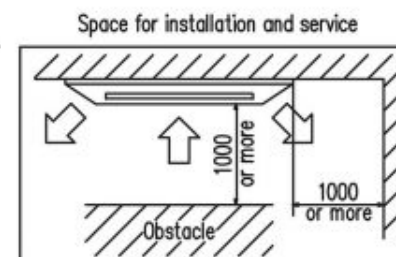

Make a space of 5000 or more between the units when installing more than one.

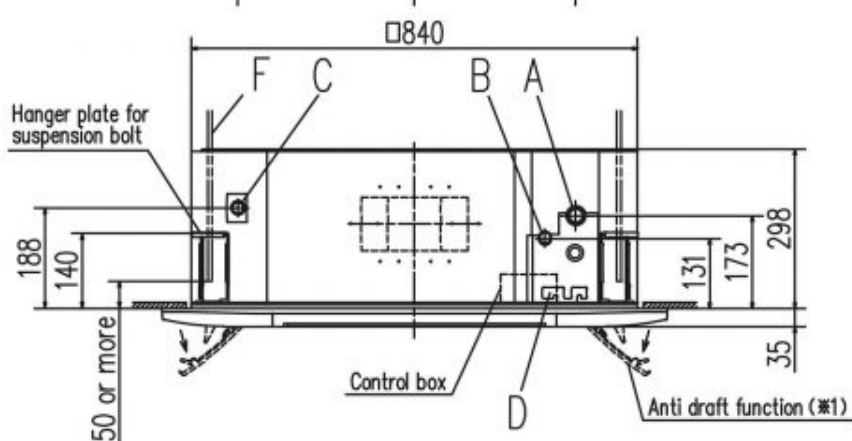

- Notes
- (1) The model name label is attached to the control box lid.
 - (2) Suspension bolt pitch P1,P2 is adjustable by a pattern of the right table.
 - (3) Section 1 (※1) is provided on the panel T-PSAE-5AW-E only.

Suspension bolt pitch range

Symbol	P1	P2
Pattern		
1	770	725~770
2	770~800	725

