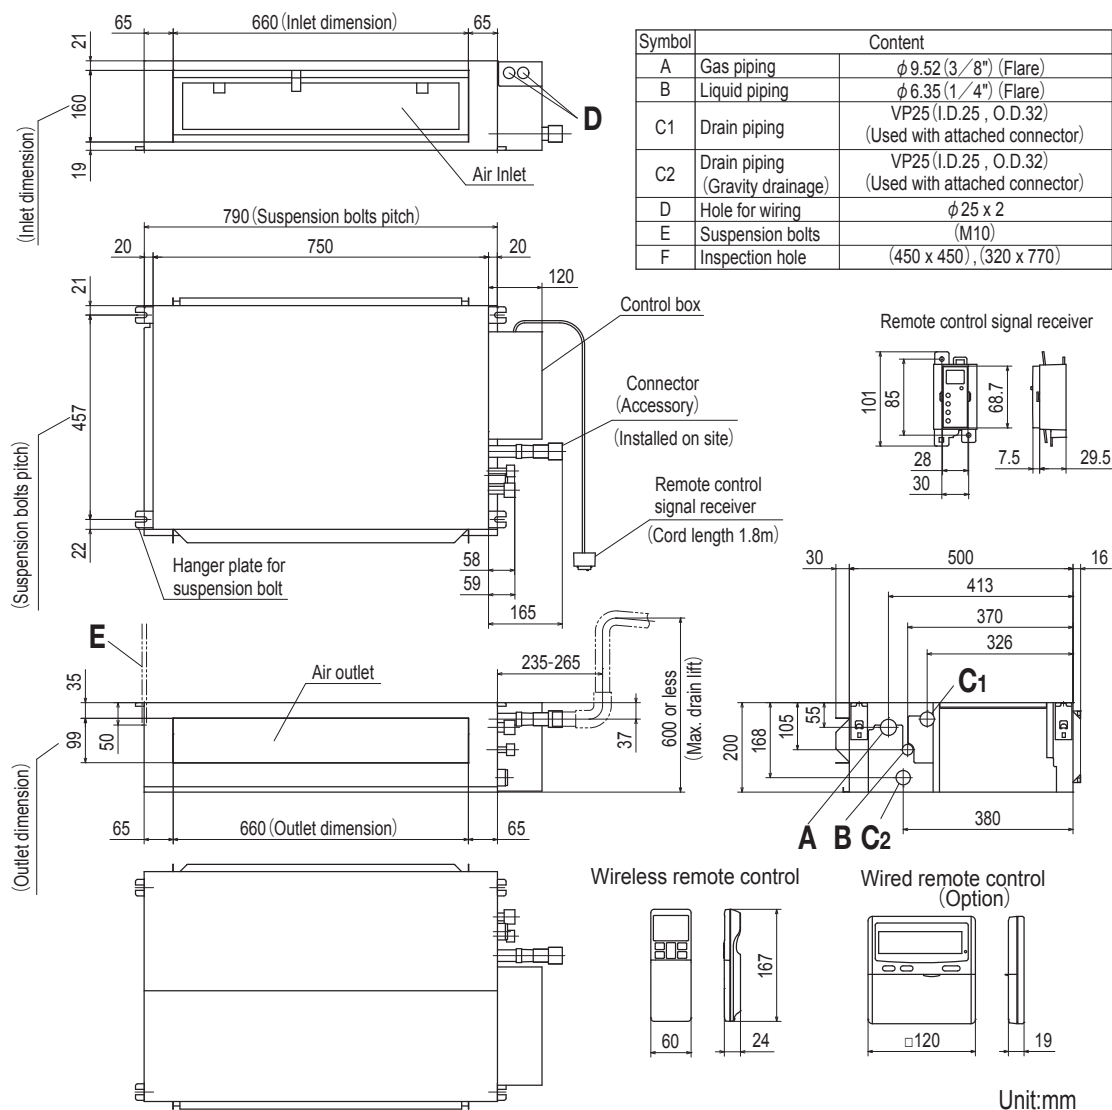
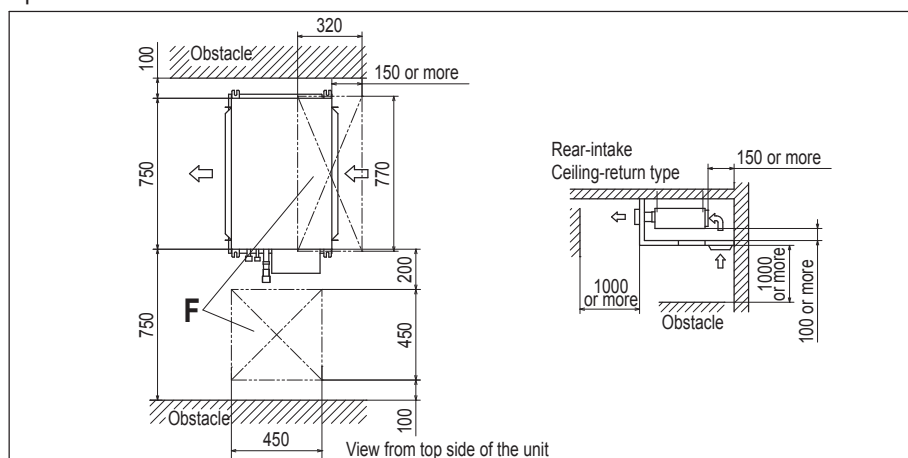


(c) Ceiling concealed type (SRR)**Models SRR25ZS-W, 35ZS-W**

Notes (1) The model name label is attached on the lid of the control box.

(2) To connect the wired remote control, the interface kit (SC-BIKN2-E) is required.



Space for installation and service

(2) Outdoor units


Models SRC20ZS-WA, 25ZS-WA2, 35ZS-WA2

- Notes
- (1) The unit must not be surrounded by walls on the four sides.
 - (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
 - (3) If the unit is installed in the location where there is a possibility of strong winds, place the unit such that the direction of air from the outlet gets perpendicular to the wind direction.
 - (4) Leave 200mm or more space above the unit.
 - (5) The wall height on the outlet side should be 1200mm or less.
 - (6) The model name label is attached on the right side of the unit.

Symbol	Content
A	Service valve connection (gas side) $\phi 9.52 (3/8")$ (Flare)
B	Service valve connection (liquid side) $\phi 6.35 (1/4")$ (Flare)
C	Pipe/cable draw-out hole
D1	Drain discharge hole $\phi 20 \times 2$ places
D2	Drain discharge hole $\phi 16 \times 9$ places
E	Anchor bolt hole M10-12 $\times$ 4places

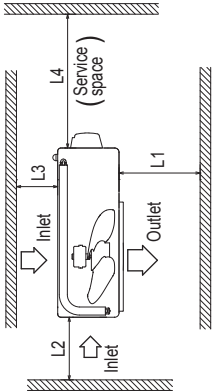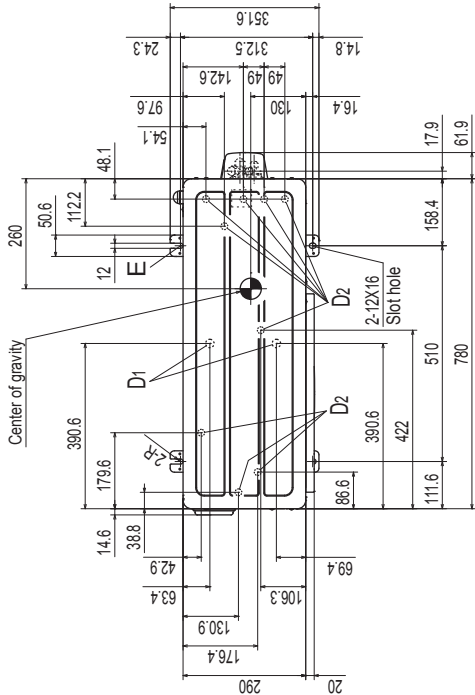

Installation space	
L1	280 or more
L2	100 or more
L3	80 or more
L4	250 or more

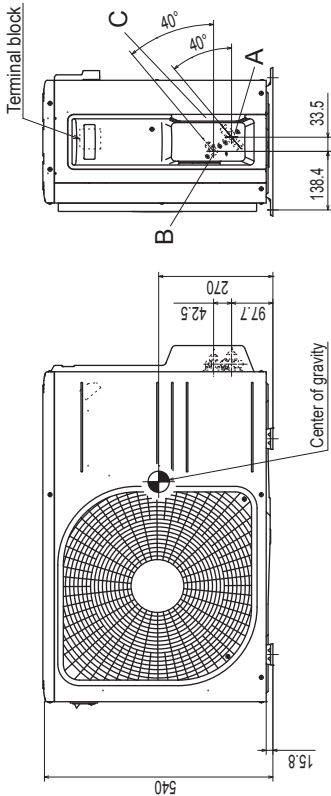

Space for installation and service when viewing from the front