

WINDOW KIT FOR LOCAL AIR CONDITIONERS

WK-400A

User manual




Translation of original user manual.

Installation of Window Kit


This product should not be installed and serviced by person (including children) who has reduced physical, sensory or mental abilities or lacks the necessary knowledge and experience. Such person needs to be supervised or instructed to install and operate the product by an individual responsible for their safety. Keep children away from the product at a safe distance. Window kit WK-400A does not prevent from falling out of the window.

1. Mark the center (M) of the window kit (Fig. 1).
2. Mark the center of the window frame and of the window sash according to the type of your window (Fig. 2-4).
3. Attach the Velcro strap (2cm wide) to the front side of the window frame and to the front side of the window sash.
4. First, attach the window kit to the side A (window frame) with Velcro, then to the side B (window sash) away from the center (M) to the left and to the right.
5. IMPORTANT! When installing the window kit with the Velcro, the point A must be exactly against the point B (Fig. 2-4).
6. When closing the window, make sure that the window kit does not get between the window sash and the window frame. Window kit or window stripping might get damaged.
7. We recommend opening the zip at the locations shown in Fig. 2-4 and marked as "S". Open the zipper and insert the hose of the air conditioner (outlet of hot air) or its ending into the hole. Then fasten the hose at both sides by the zipper.

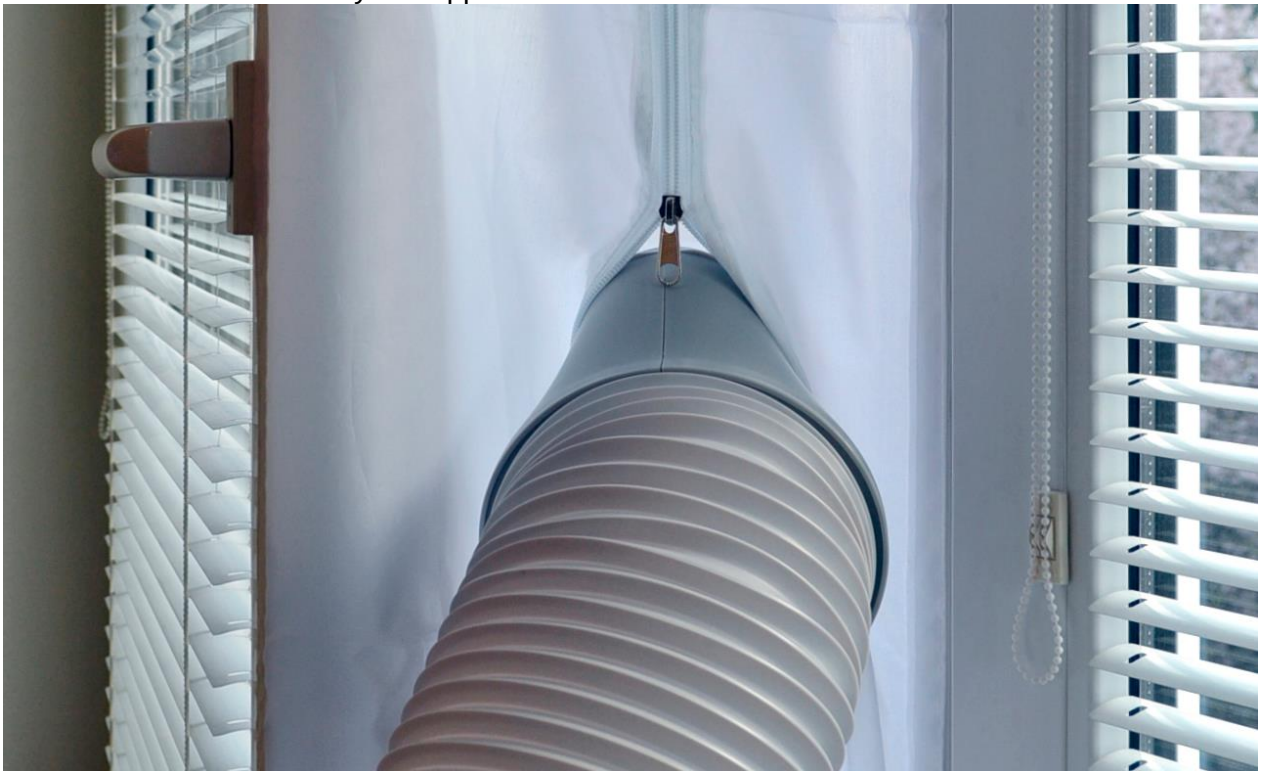


8. To uninstall the window kit, use the reverse procedure. If you are considering to use the window kit in the the future, do not remove the Velcro from the window sash and the frame.


1.

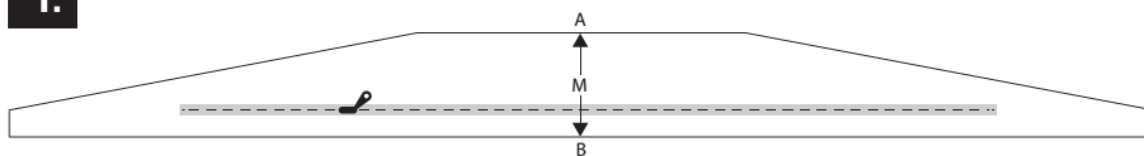


2.

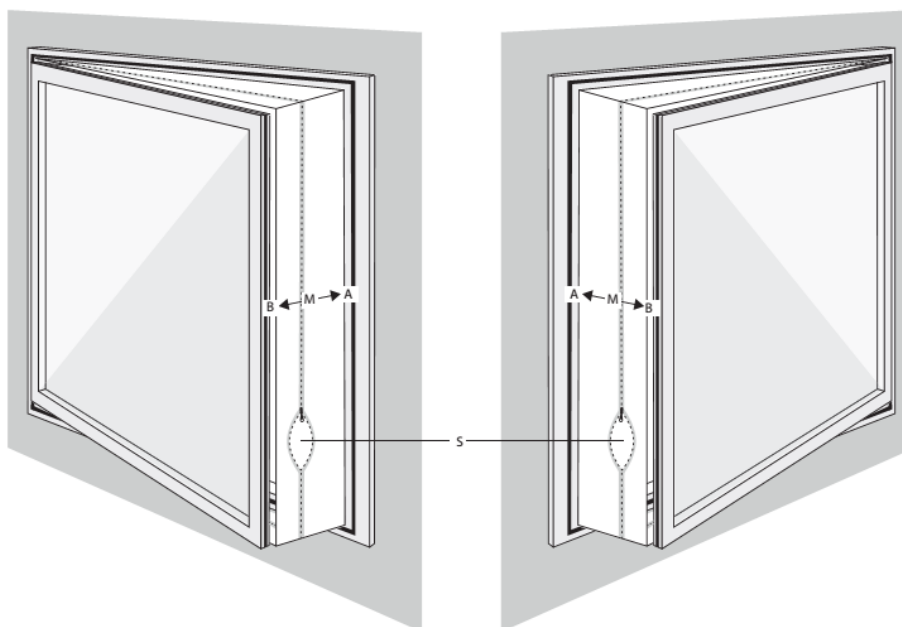

3.

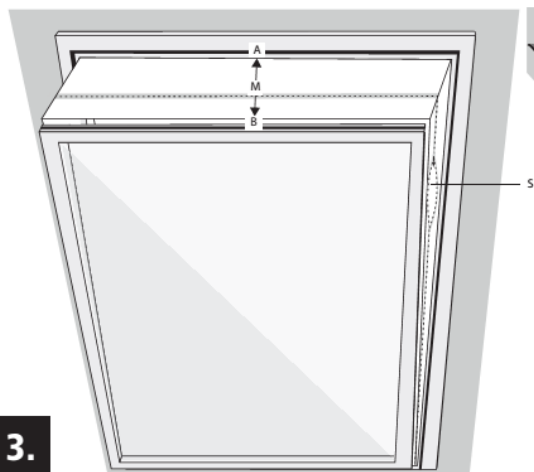

4.

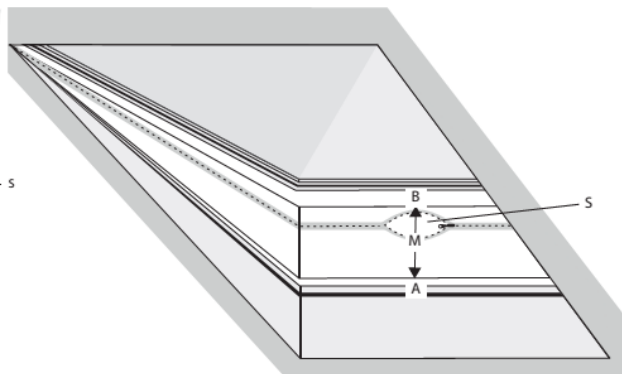

Producer

SINCLAIR CORPORATION Ltd.
1-4 Argyll St.
LONDON
W1F 7LD
United Kingdom

www.sinclair-world.com

Made in China

Representative, service

NEPA spol. s r.o.
Purkyňova 45
Brno
612 00
Czech Republic

Phone.: +420 541 590 140
Fax: +420 541 590 124

www.sinclair-solutions.com
info@sinclair-solutions.com



Use a program for curtains with a maximum temperature of 40 ° for washing.



The product must not be dried in a tumble dryer.

