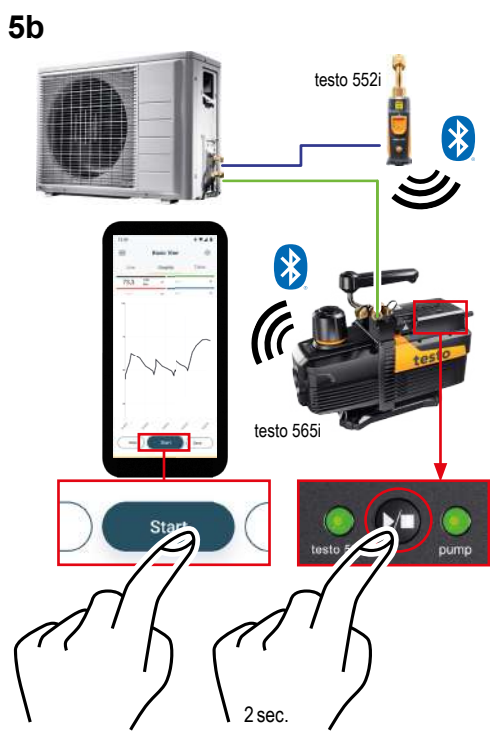
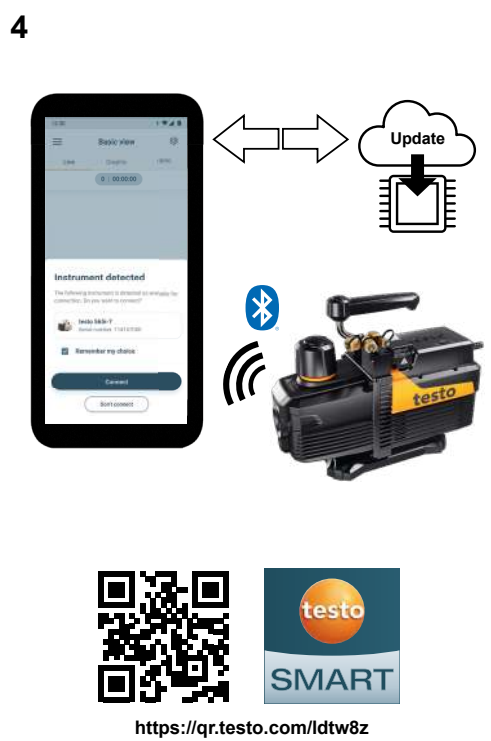
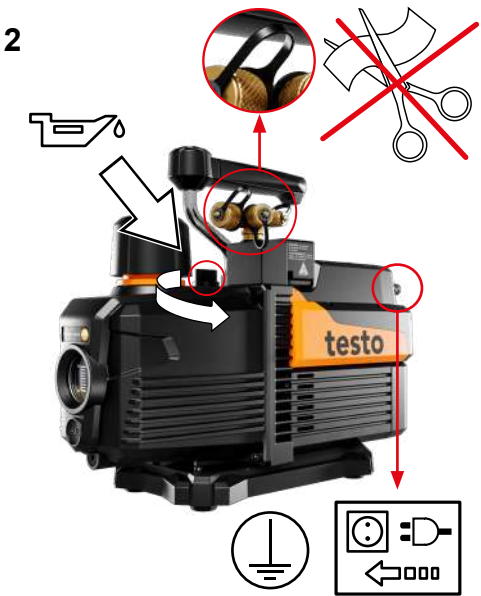


7 cfm (0564 5652 XX) 375 x 150 x 314 mm 14.8 x 5.9 x 12.4 in	+5...+40 °C +41...104 °F 0564 5652 10/ 0564 5653 10: +8...+40 °C +46...104 °F	11,3 kg 24.9 lb	100 ... 120 V~ / 50 ... 60 Hz	220 ... 230 V~ / 50 ... 60 Hz	max. 15 micron	1/4" SAE 3/8" SAE 1/2" SAE
10 cfm (0564 5653 XX) 375 x 150 x 314 mm 14.8 x 5.9 x 12.4 in	 -10...+50 °C +14...+122 °F	12,1 kg 26.7 lb	3,3 A / max. 10,1 A 950 W	1,9 A / max. 5,5 A 940 W		198 l/min 7 CFM 283 l/min 10 CFM

Approvals and Certification

Product	testo 565i	
Mat.-No.	7 CFM	10 CFM
	0564 5652 02 0564 5652 05	0564 5653 02 0564 5653 05
Model No	0564 5652	0564 5653
Date	22.11.2024	

The use of the wireless module is subject to the regulations and stipulations of the respective country of use, and the module may only be used in countries for which a country certification has been granted. The user and every owner has the obligation to adhere to these regulations and prerequisites for use, and acknowledges that the re-sale, export, import etc. in particular in countries without wireless permits, is his responsibility.

Country	Comments
Europa + EFTA	  Hereby, Testo SE & Co. KGaA declares that the radio equipment types testo 565i (0564 5652, 0564 5652 02, 0564 5652 05, 0564 5653, 0564 5653 02, 0564 5653 05) are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.testo.com/eu-conformity EU countries: Belgium (BE), Bulgaria (BG), Denmark (DK), Germany (DE), Estonia (EE), Finland (FI), France (FR), Greece (GR), Ireland (IE), Italy (IT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Sweden (SE), Slovakia (SK), Slovenia (SI), Spain (ES), Czech Republic (CZ), Hungary (HU), Republic of Cyprus (CY). EFTA countries: Iceland, Liechtenstein, Norway, Switzerland  WEEE Reg. no. DE 75334352
United Kingdom (GB)	  The UK Declaration of Conformity can be found on the testo homepage www.testo.com under the product specific downloads.
Chile	Approved

Bluetooth® data	Feature	Values
	Radio range	up to 60 m (196 feet) (free field)
	Type	Bluetooth® Low Energy (BLE) Lierda LSD4BT-S98B
	RF Band	2402-2480 MHz
	Output power	<10 dBm
Bluetooth® SIG Listing	Company	Lierda Technology Group Co., Ltd.
	Declaration ID	D051404
Member company		Testo SE & Co. KGaA

Product	testo 565i	
Mat.-No.	7 CFM	10 CFM
	0564 5652 04	0564 5653 04
Model No	0564 5652	0564 5653

Country	Comments
Argentina	Approved
Australia	 E1561

Bluetooth® data	Feature	Values
	Radio range	up to 60 m (196 feet) (free field)
	Type	Bluetooth® Low Energy (BLE) Lierda LSD4BT-S98B
	RF Band	2402-2480 MHz
	Output power	<10 dBm
	Company	Lierda Technology Group Co., Ltd.

Product	testo 565i	
Mat.-No.	7 CFM	10 CFM
	0564 5652 01	0564 5653 01
Model No	0564 5652 01	0564 5653 01

Country	Comments
Canada	For 7CFM: IC: 6127B-0564565201 For 10CFM: IC: 6127B-0564565301 See IC Warnings
USA	 For 7CFM: FCC ID: WAF-0564565201 For 10CFM: FCC ID: WAF-0564565301 See FCC Warnings

Bluetooth® data	Feature	Values
	Radio range	up to 60 m (196 feet) (free field)
	Type	Bluetooth® Low Energy (BLE) Lierda LSD4BT-S98B
	RF Band	2402-2480 MHz
	Output power	<10 dBm
Company		Lierda Technology Group Co., Ltd.

Product	testo 565i	
Mat.-No.	7 CFM	10 CFM
	0564 5652 06	0564 5653 06
Model No	0564 5652	0564 5653

Country	Comments
China	For 7CFM: CMIIT ID: 24J9939L5652 For 10CFM: CMIIT ID: 24J9939L5653

Bluetooth® data	Feature	Values
	Radio range	up to 60 m (196 feet) (free field)
	Type	Bluetooth® Low Energy (BLE) Lierda LSD4BT-S98B
	RF Band	2402-2480 MHz
	Output power	<10 dBm
Company		Lierda Technology Group Co., Ltd.

Product	testo 565i	
Mat.-No.	7 CFM	10 CFM
	0564 5652 07	0564 5653 07
Model No	0564 5652	0564 5653

Country	Comments
South Korea	 R-R-te2-1565i See KCC Warning

Bluetooth® data	Feature	Values
	Radio range	up to 60 m (196 feet) (free field)
	Type	Bluetooth® Low Energy (BLE) Lierda LSD4BT-S98B
	RF Band	2402-2480 MHz
	Output power	<10 dBm
Company		Lierda Technology Group Co., Ltd.

Product	testo 565i	
Mat.-No.	7 CFM	10 CFM
	0564 5652 10	0564 5653 10
Model No	0564 5652 01	0564 5653 01

Country	Comments
Japan	 R Contains S98 BLE module: 201-200960 See Japan information

Bluetooth® data	Feature	Values
	Radio range	up to 60 m (196 feet) (free field)
	Type	Bluetooth® Low Energy (BLE) Lierda LSD4BT-S98B
	RF Band	2402-2480 MHz
	Output power	<10 dBm
	Company	Lierda Technology Group Co., Ltd.

IC Warnings

CAN ICES-3(A)/NMB-3(A)
This Class A digital apparatus complies with Canadian ICES-3.
Cet appareil numérique de la classe A est conforme à la norme NMB-3 du Canada.

RSS-Gen & RSS-247 statement:
This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).
Operation is subject to the following two conditions:
(1) this device may not cause interference, and
(2) this device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.
L'exploitation est autorisée aux deux conditions suivantes :
(1) L'appareil ne doit pas produire de brouillage
(2) l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et
(2) l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution
Radio Frequency Radiation Exposure
This equipment complies with radio frequency exposure limits set forth by the Innovation, Science and Economic Development Canada for an uncontrolled environment.
This equipment should be installed and operated with a minimum distance of 20 cm between the device and the user or bystanders.

Co-Location
This device must not be co-located or operated in conjunction with any other antenna or transmitter.
Attention
exposition au rayonnement de radiofréquences
Cet équipement est conforme aux limites d'exposition aux radiofréquences définies par la Innovation, Sciences et Développement économique Canada pour un environnement non contrôlé.

Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre le dispositif et l'utilisateur ou des tiers.
Co-Location
Ce dispositif ne doit pas être utilisé à proximité d'une autre antenne ou d'un autre émetteur.

FCC Warnings

Information from the FCC (Federal Communications Comm/ssion)
For your own safety
Shielded cables should be used for a composite interface. This is to ensure continued protection against radio frequency interference.

FCC warning statement
This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Caution
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Shielded interface cable must be used in order to comply with the emission limits.
Warning
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Caution
Radio Frequency Radiation Exposure
This equipment complies with radio frequency exposure limits set forth by the FCC for an uncontrolled environment.
This equipment should be installed and operated with a minimum distance of 20 cm between the device and the user or bystanders.
Co-Location
This device must not be co-located or operated in conjunction with any other antenna or transmitter.

KCC Warning

해당 무선 설비는 운용 중 전파혼신 가능성이 있음

Japan Information

当該機器には電波法に基づく、技術基準適合証明等を受けた特定無線設備を装着している。

Manufacturer/ importer

Testo SE & Co. KG aA
Celsiusstr. 2, 79822 Titisee-Neustadt, Germany
www.testo.com
Warning: Please follow the instructions when using the product.